

MEB Series

Adjustable Edgebanding Slot Gun



Adaptable and reliable.

Valco Melton's **MEB Gun Series Coating Applicator** improves obsolete, previously existing roller systems with a new and advanced engineering technology that reduces costs and allows for easy configuration. For intermittent and several application widths, the MEB hot melt guns bring the most reliable solution for wood sealing and adhesive application.

Valco Melton's MEB Gun Series:

- Up to 90 mm of application coating width
- Suitable for a range of hot melt reactive adhesives such as PUR and EVA
- 100% easily configurable

Easy initial height adjustment

Module uses advanced telescopic technology for a precise cut off



Manual regulation for adjustment of the coating width, up to 90 mm

Dual orientation to ensure production versatility

100% compatible connectors

MEB Series

APPLICATION

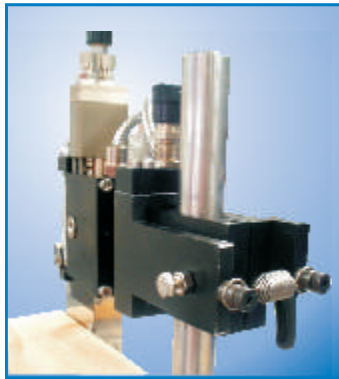

For high quality adhesive applications and the sealing of wood edges, Valco Melton's MEB Coating Gun Series brings the latest in technology by offering increased strength with a new spring system to resist high wood impact during the application process. The innovative design provides maximum flexibility in movement and resistance to deterioration from edgebanding work.

THE TOTAL PACKAGE.

Valco Melton's range of application products offer a complete selection of hot melt components and support equipment:

- RTD hot melt hoses
- Manual and automatic dispensing valves
- Nozzle and applicator styles
- Mounting bracket packages
- Solid-state pattern control systems
- In-line filters
- Replacement parts for competitive systems
- High-performance hot melt adhesives
- Cost-effective rebuild/exchange programs

Technical Specifications

MEB Series Characteristics	
Max. Operating Temperature	240 ° C / 464 ° F
Max. Operating Hydraulic Pressure	100 bar/ 1450 psi
Max. Operating Cycle Rate	150 cycles per minute
Operating Air Pressure	4 - 6 bar/ 58 - 87 psi
Electric Supply	190-250 VAC 50/60 Hz
Max. Application Width	90 mm

ISO 9001

QUALITY SYSTEMS



LimTeknikk AS
Industrielle limsystemer

Web: www.limteknikk.no E-mail: info@limteknikk.no Tel: (+47) 918 91 400

For more information visit www.valcomelton.com, or contact your local representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel: 513.874.6550 • Fax: 513.874.3612 • info@meltonhotmelt.com

European Headquarters: Spain, Navarra • Tel: +34.948.321.580 • Fax: +34 948 326 584 • melton@melton.es

Asian Headquarters: China, Xiamen, Fujian • Tel: +86.592.591.7854 • Fax: +86.592.591.7834 • china@valcomelton.com

www.valcomelton.com • Serving Over 52 Countries Worldwide.

